


Levers

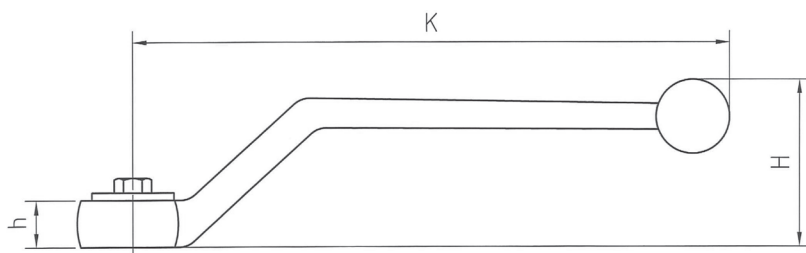

Zinc ▪ Off-Set Design


SW	Dimensions (mm/in)			Weight (kg/lbs)	Order Codes
7	80	6,5	30	0,03	Lever-BV-SW07-ZNO
	3.15	.26	1.18	.07	
9	115	8,7	45	0,09	Lever-BV-SW09-ZNO
	4.52	.34	1.77	.20	

Carbon Steel ▪ Off-Set Design

SW	Dimensions (mm/in)			Weight (kg/lbs)	Order Codes
7	80	6,5	30	0,05	Lever-BV-SW07-CS0
	3.15	.26	1.18	.11	
9	115	9	47	0,09	Lever-BV-SW09-CS0
	4.52	.35	1.85	.20	
14	170	12	64	0,23	Lever-BV-SW14-CS0
	6.73	.47	2.52	.51	
17	306	17	80	0,66	Lever-BV-SW17-CS0
	12.04	.69	3.15	1.45	


Stainless Steel V4A ▪ Off-Set Design

SW	Dimensions (mm/in)			Weight (kg/lbs)	Order Codes
7	60	6,5	22	0,04	Lever-BV-SW07-W50
	2.36	.26	.87	.09	
9	115	9	47	0,10	Lever-BV-SW09-W50
	4.52	.35	1.85	.22	
14	173	12	64	0,23	Lever-BV-SW14-W50
	6.80	.47	2.52	.51	
17	227,5	15	90	0,66	SW17-W50
	8.96	.59	3.54	1.45	

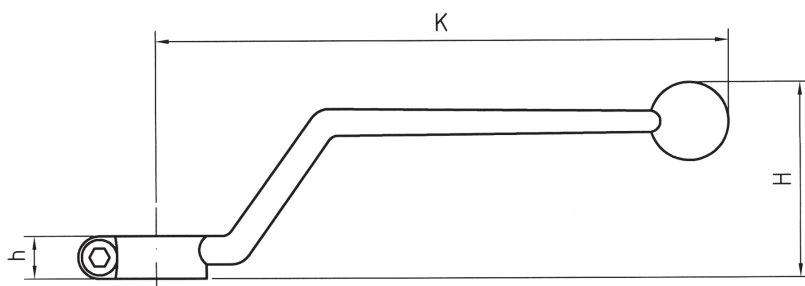

Aluminium ▪ Off-Set Design

SW	Dimensions (mm/in)			Weight (kg/lbs)	Order Codes
12	160	12	55	0,07	Lever-BV-SW12-ALO
	6.30	.47	2.17	.16	

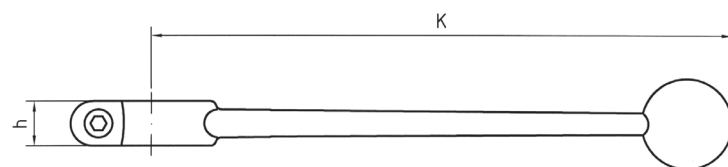

Zinc ▪ Straight Design

SW	Dimensions (mm/in)		Weight	Order Codes
	K	h	(kg/lbs)	
9	155	10	0,09	Lever-BV-SW09-ZNS
	6.10	.29	.20	
14	200	14	0,22	Lever-BV-SW14-ZNS
	7.87	.55	.48	

Aluminium ▪ Straight Design

	Dimensions (mm/in)		Weight	Order Codes
SW	K	h	(kg/lbs)	
9	150	11	0,06	Lever-BV-SW09-ALS
	5.91	.43	.13	
14	200	12	0,11	Lever-BV-SW14-ALS
	7.87	.47	.24	
17	320	16	0,27	Lever-BV-SW17-ALS
	12.60	.63	.59	

Please note: Alternative lever designs and materials deviating from the delivery standard can be ordered by adding -ZNO, -CS0, -W50, -ALO, -ZNS or -ALS at the end of the ordering code of the complete ball valve (e.g. FBV-2-G20-0001-M-W50).

